

VRLA Battery Specification

---12V Series




6-FM-9 (12V9Ah)



Specifications

Nominal Voltage	12 V	
Nominal Capacity(C20)	9Ah(1.75V/cell@25°C)	
Dimensions	151*65*94*99mm	
Approx .Weight	2.45 kg (1 ±3%)	
Internal Resistance	Approx.18mΩ@25°C	
Terminal	F1、 F2	
Operating Temperature Range	Discharge: -20°C ~ 55°C (-4 ~ 104°F)	
	Charge: 0°C~ 40°C (-4 ~ 104°F)	
	Storage : -20°C ~ 55°C (-4 ~ 122°F)	
Nominal Operating Temperature Range	25±3°C (77±5°F)	
Max. Charging Current	2.7A @25°C	
Charging voltage(25°C)	Float : 2 .25V ~ 2 .30V/cell	
	Temp.Coefficient : -3mV/°C	
	Equalization : 2 .40V ~ 2 .45V/cell	
	Temp.Coefficient : -4mV/°C	
	Cycle : 2 .40V~2 .45V/cell	
	Temp.Coefficient : -5mV/°C	
Effect of temperature to rated Capacity(C20)	40°C (104°F)	105%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3%/month@ 25°C	
Casing material	ABS(UL94 HB or V-0 optional)	

Layout

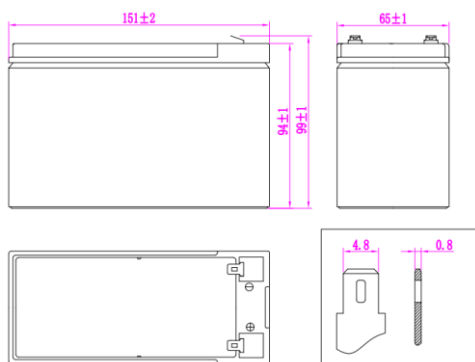

Constant Current Discharge*(Amperes @25°C/77° F)

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	33.6	21.7	16.4	9.35	5.59	3.27	2.35	1.88	1.59	1.060	0.867	0.464
10.20V	29.6	20.0	15.3	8.94	5.40	3.18	2.28	1.83	1.55	1.040	0.848	0.454
10.50V	27.6	19.1	14.8	8.75	5.31	3.13	2.25	1.80	1.53	1.030	0.838	0.450
10.80V	25.5	18.2	14.3	8.54	5.21	3.08	2.22	1.78	1.51	1.010	0.828	0.445
11.10V	23.5	17.3	13.7	8.33	5.12	3.03	2.18	1.75	1.49	1.000	0.818	0.440

Constant Power Discharge*(Watts/Unit @25°C/77° F)

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	61.8	40.4	30.6	17.7	10.70	6.32	4.57	3.66	3.12	2.10	1.72	0.927
10.20V	55.2	37.6	29.0	17.1	10.40	6.17	4.46	3.58	3.05	2.06	1.68	0.909
10.50V	51.7	36.0	28.1	16.8	10.30	6.09	4.40	3.54	3.01	2.03	1.66	0.899
10.80V	48.2	34.6	27.3	16.4	10.10	6.01	4.35	3.50	2.98	2.01	1.64	0.890
11.10V	44.7	33.1	26.4	16.1	10.00	5.93	4.29	3.45	2.94	1.99	1.63	0.881



VRLA Battery Specification

---12V Series



6-FM-9 (12V9Ah)

General Features

- 10 years design life
- Very low Self-discharge rate
- Wide range of operating temperature
- 100% Sealed and maintenance free
- Good conductivity
- Excellent charge acceptance
- Safe and reliable explosion-proof regulating valve


Applications

- Telecommunications
- UPS、Data Center
- Energy Storage, Electric Systems
- Emergency Lighting, Security
- Medical, Electronic Equipment
- Motive Power


Standards

- Compliant with IEC60896, IEC61427, GB/T19638, YD/T1360-2015, YD/T799, DL/T637
- Certified for TLC, CE, RoHS and Reach compliance
- The company Aokly is certified under TS16949, OHSAS18001, SA8000, ISO9001, ISO14001, ISO45001 and ISO50001 management systems


Discharge Characteristics(25°C)

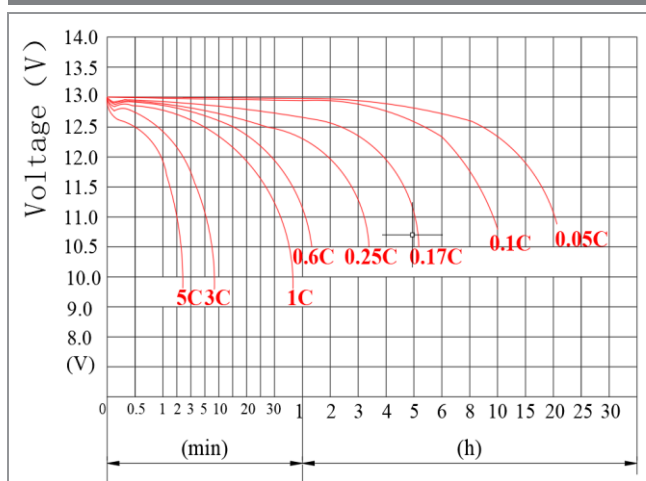

Charging Characteristics(25°C)

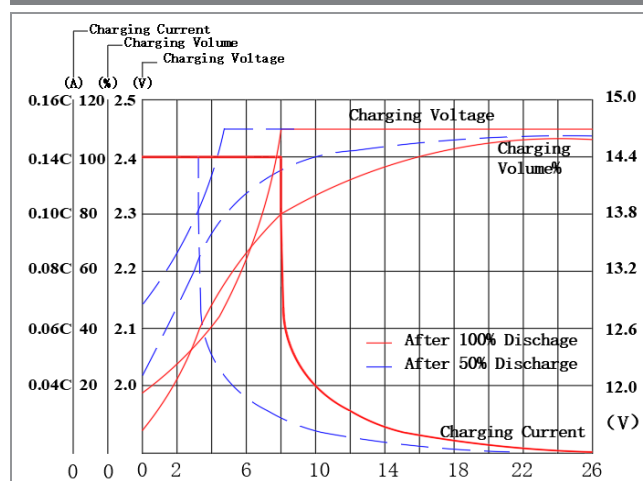

Rel. The between Temp. and Charging Volt.

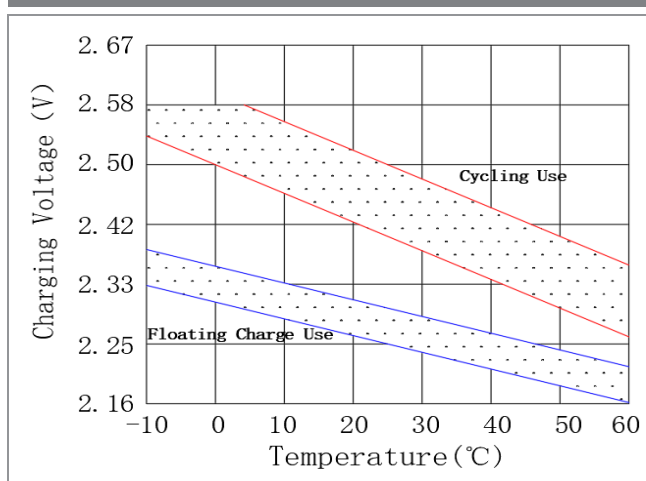

Capacity Retention Characteristics

