

EFB Start-Stop Battery Specification

6-QTPE-70(700A) , EFBL3




This product is specially designed for cars equipped with advanced start-stop systems. The reinforced grid, high-porosity PE separator, independently developed paste curing patent, etc. make the battery safe and reliable, with excellent high-current discharge performance and charge acceptance capabilities. Good and deep cycle life characteristics.

PICTURE



DIMENSION

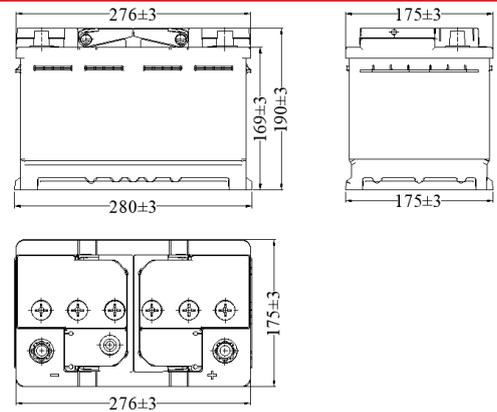


SPECIFICATION

Nominal Voltage/ V		12
Weight/±3%kg		19.5
Nominal Capacity/Ah		70
Reserve Capacity/min		120
-18°C CCA/A		700
Max Dimensions	L/mm	280
	W/mm	175
	H/mm	190
	TH/mm	190
CCA		800
Temperature	Discharge/°C	-40 ~ +60
	Charging/°C	-40 ~ +60
	Storage/°C	-40 ~ +60
Optimum Temperature/°C		+10 ~ +30
Constant Charging Current/A		7.0
Constant Charging Voltage/V		13.5 ~ 13.8
Max Charging Current/A		21.0
Cover Material		PP
Executive Standard		GB/T 5008-2023

TERMINAL DIMENSION

Terminal Type	D/mm	
	Positive	Negative
T2	19.5 ⁺⁰ _{-0.3}	17.9 ⁺⁰ _{-0.3}

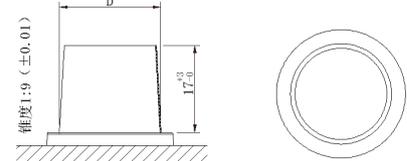

Discharge Curve/25



File Serial No. AKL/XC-6-QW-66EFB/01A